


Neckloop-PTT



Part-No.: 0131000-22

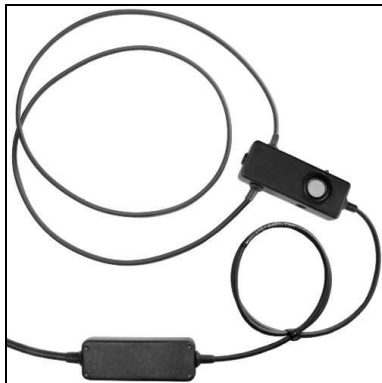

Neckloop-PTT for covert communication

Purpose-built for both, semi covert and covert use, this rugged and most flexible induction set is to operate with almost any kind of analogue or digital radio. The send button with integrated microphone is fixed on the neckloop. The set furthermore provides two jack ports, to add external accessories. This ensures a multi-purpose way of communication.

The housing with integrated PTT and microphone provides a 3.5 mm bushing to add an external earpiece like the DE224 (acoustic tube with ear olive) or common ear phones for semi-covert communication use. A small switch on the side is to increase the sensitivity of the microphone ("whisper mode").

The electronic adjustment to a certain analogue or digital radio is located in a small box, close to the radio connector. This housing furthermore offers a 2.5 mm bushing to add an external send button, like the PTT-1. This barrel- PTT allows sending radio messages in a most discreet way. As additional discreet hearing accessory, the Induction receivers Indukt RS7 or Indukt RS8 are available upon request. This Neckloop-PTT is also to operate with further non-Imtradex inductive earpieces.

Technical data:

Microphone:

Pattern:	electret
Directional:	omni-directional
Impedance:	1200 Ω
Sensitivity (switchable):	-27 / -47 dB V / Pa, 1 kHz
Frequency:	50 Hz – 16 kHz

Neckloop:

Repeating coil:	EFD 15/8/5
Inductance:	ca. 17 μ H

Send button (integrated):

Housing:	Pentamid B (MV) GV 30 H, black
Life cycle PTT:	min. 1.000.000 cycles

Additional data:

Temperature range:	-10°C to +60°C
Weight:	58 g (without plug)

Digital Standard approved



TECHNICAL DATA