


TM2



Part-No.: 06TM2-1

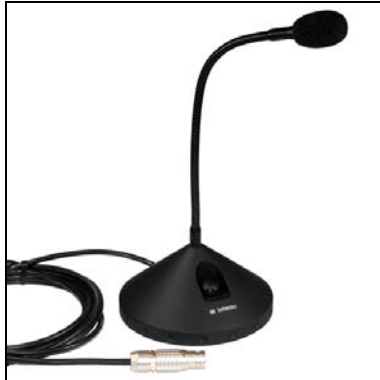

To use in Dispatch places and Control Centres

The TM2 is a filigree table microphone made of anodized aluminium. The solid base offers reliable stability and a high noise-attenuation of impact sounds. The flexible gooseneck allows exact positioning of the microphone this enables best talk quality. Optionally, the TM2 is available with or without send button.

The TM2 offers a large variety of applications. Mainly, this table microphone is used in control stations or AirTraffic Control centres. The required VCS connector will be additionally assembled, depending on the Voice Communication System used.

Technical data:

Microphone:

Pattern:	electret
Directional:	non-directional
Impedance:	1000 Ohm
Sensitivity:	-47 dB V / Pa, 1 kHz
Frequency:	100 Hz – 16 kHz

Amplifier:

Operating voltage:	+/- 12 V
Power input:	15 mA
Distortion factor:	0,2 %
Amplification:	approx. 35 dB

Additional data:

MTBF:	approx. 100.000 h.
Life cycle PTT:	min. 500.000 cycles
Length gooseneck:	22 cm
Temperature range:	-20°C to +70°C
Weight:	700 g