


OnGuard II-GSM



Part-No.: 0131000-51

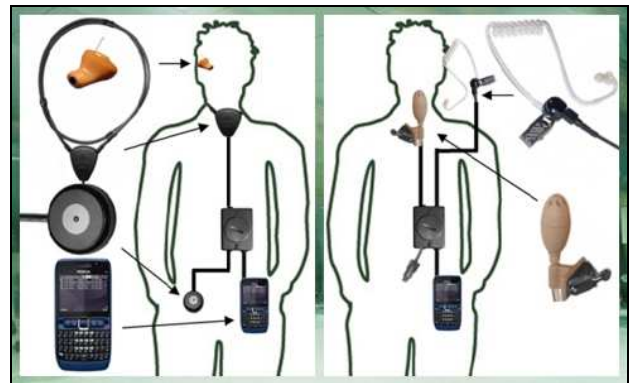

Covert and semicovert use

The OnGuard II-GSM was especially designed for encrypted speech transmission with a certain type of mobile phones. Depending on your specific communication demands, we offer different send buttons, microphones and earpieces to this induction set. The OnGuard II-GSM is meant to wear discreetly, so push button and GSM can be carried in a pocket of jeans or jacket.

The picture on the left side shows the core piece of the OnGuard II-GSM. Use the 3.5mm jack to link it to your GSM with the The other 2 cables are to connect external hear-/ talk accessories. Semi-covert and covert ways of use are illustrated in the picture on the right hand side. For semi-covert use, please add a PTT-20 send button, the lapel microphone and external earphones (DE224).

Alternatively, the Neckloop with integrated microphone and induction earpiece RS7 care for a discreet way of communication in covert use. For the OnGuard II-GSM, Imtradex offers the following accessories:

- Neckloop (Neckloop-GSM) with integrated microphone, black, separable
- Neckloop (Neckloop-GSM) with integrated microphone, black, not separable
- Induction earpiece RS7
- Label microphone-GSM, beige colour
- Earphones, stereo, 3.5mm jack, black
- Earphone DE 224, 3.5mm jack, black
- Send button PTT-20GSM, black with short or long cable
- Send button PTT-1GSM, black with short or long cable

Technical data¹:

Housing OnGuard II-GSM:

Material:	Polystyrol (UL 94 HB), black
Power input:	30 mA (incl. Neckloop-GSM)
Operating voltage:	13 V DC
Battery type:	Cell battery 2430
Dimensions (LxWxH)	50 mm x 39 mm x 14 mm
Weight:	60 g

¹ Further to the flexible way of use, please understand that technical data vary and can not be determined exactly in this case.

TECHNICAL DATA